


**GENERAL  
MARINE**

## ***SLIPREEL* INSTALLATION INSTRUCTIONS**

If you board your boat from the port side mount the *SLIPREEL* on the pilings located on the starboard side of the boat, always mount the slip reel on the opposite side from which you board. Recommended, mounting one slip reel for the bow and one for the stern. For piling mount: remove cover locate top mounting hole of *SLIPREEL* approximately 1 foot above boat deck at maximum high tide, drill proper size hole for ½ inch by 3 ½ inch stainless steel or galvanized lag bolt with washer use equivalent concrete anchors or studs for concrete pilings install lag bolt through top mounting hole in slip reel (snug) if then install bottom lag tighten both. Install to boat cleats two static lines on the dockside of the boat one for the bow and one for the stern. Adjust static lines so boat is centered in slip during midtide. Forward or back preventer lines may be installed as shown in sketch below or from piling to amid ship cleat. Mark line or use loop ends so it will be attached to the same length each time boat returns. Attach slip reel lines to cleats on the other side of the boat if more tension is required just pull more line from the slip reel then attach. Below is recommended installation layout.

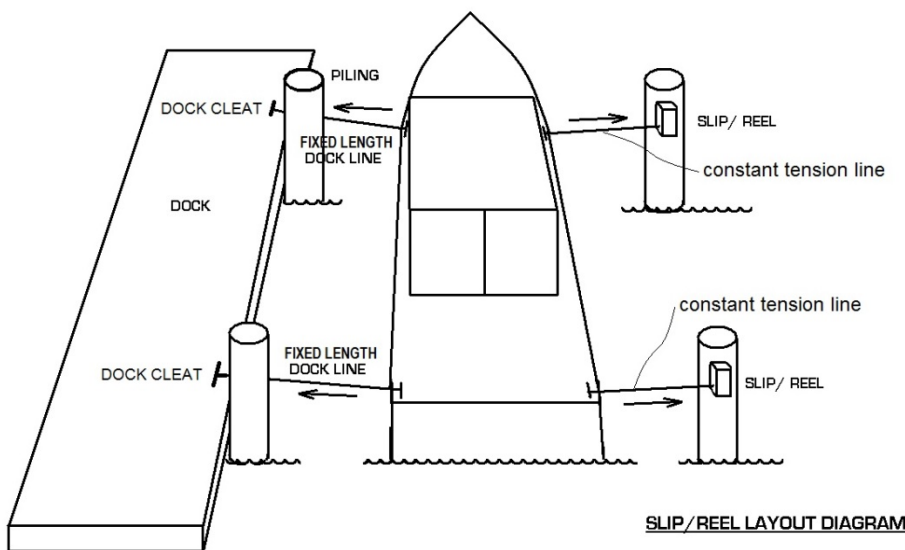

Maintaining your boat in the middle of your slip is easy with the Slip/Reel.

How the Slip/Reel works:

1. First mount a Slip/Reel on each piling opposite the boarding side of your boat one for the bow and one for the stern.
2. From the dock attach a line for the bow and the stern leave slack.
3. Rest your boat on the outside pilings.
4. Attach the spring tension lines from each Slip/Reel to your boat.
5. Now pull your boat to the center of your slip and tieup the lines from the dock to the cleats on your boat.

Your boat will now be centered regardless of tide change, wind or wakes.  
To dis-embark your boat just pull the lines from the dock until your boat rests at the dock and tie up. To embark while on the dock pull the dock lines until your boat is at the dock and tieup and board your boat.

**CUSTOMER SERVICE NUMBER**  
Email: [info@dockingproducts.com](mailto:info@dockingproducts.com)

**954-298-4890**